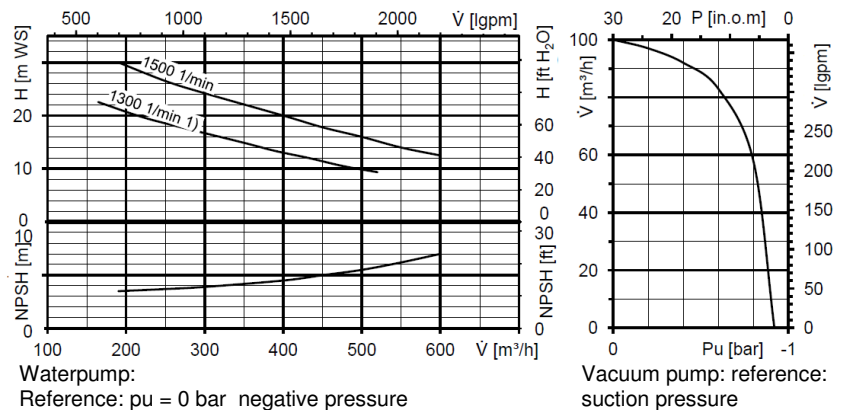


EVA 350

**Application:**

Building industry – Industry – Communities

- Average
- Domestic sewage
- Canal sanitation
- Sewage pumping
- Pit pumping
- Thick slurry pumping
- Slime pumping
- Transfer pumping

Function principle:

The sewage water pump together with the vacuum generator both powered by electric motors ensure a continuous flow of the medium. The separator-chamber, installed at the inlet of the sewage pump allows the air of the suction-line to be separated from the water and consequently the water pump conveys only the liquid medium. This combined system ensures a safe and fast suction process.

Features:

- Self priming sewage-pump aggregate with switch board
- Main plug 125 A
- Assembled on galvanized base frame
- horizontal sewage-pump with screw type centrifugal impeller
- dry running, almost service free vacuum pump
- separation of air/water mixture through galvanized air separation system
- switch board protection IP 54, with thermal motor protection for electric motor. The start of the sewage pump is being effected by an electronic starting current limiter. Dry running and overpressure protection are integrated

Options:

- Frequency converter

| Type | Sewage Pump | | | | Vacuum Pump | | | Motors | | | | | Shipping dimensions appr. | | |
|--------|--------------------|------------------------------------|-------------|-----------------|-------------|---------|-------------------|-------------------|----------|------------------|------------------|------------------|---------------------------|-------------------------|--------|
| | Capa-city | Head | Con-nection | Max. solid size | Capa-city | Va-cuum | RPM ¹⁾ | Protectio-n class | Vol-tage | Power | | Rated current | | Length x width x Height | Weight |
| | | | | | | | | | | WP ²⁾ | VP ³⁾ | WP ²⁾ | VP ³⁾ | | |
| | | | | | | | | | | | | | | | |
| m³/h | m H ₂ O | DN _s DN _D | Ø | m³/h | bar | 1/min | U | P | P | I _{enn} | I _{enn} | l x b x h | m | | |
| EVA350 | 510-600 | 24,5-30 | 159 V | 115 | 100 | -0,92 | 1500 | IP 54 B 3 | 400 | 30 | 3 | 54,6 | 6,8 | 2725 x 1170 x 1630 | 1257 |

¹⁾ Additional RPM only with Option: Frequency converter

²⁾ WP = Water pump

³⁾ VP = Vakuumpump

Subject to change without prior notice!

HÜDIG - your partner to solve water problems.

HÜDIG®

GmbH & Co. KG

Absenk- und Berechnungsanlagen
Heinrich-Hüdig-Straße 2 · 29227 Celle
Telefon (0 51 41) 88 45-0 · Fax (0 51 41) 8 69 18
e-mail: Info@huedig.de