Stand 05/19	**Technische Daten**	
HÜDIG whisper SL		HÜDIG®
Sound-Absorbing Hood for Electro Vacuum Unit HC 468		www.huedig.de

Application:
Construction Industry – General Industry – Municipalities - Conveying of ground water

Operation and Design:
This sound-absorbing hood is designed for the complete encapsulation of HÜDIG Electro Vacuum Pump Units of the model range HC 468. The galvanized steel-frame is rugged and stackable designed (up to three (3) complete units can be stacked). The unit features forklift-eyes and a central lifting lug for safe transport. The noise pressure level in a distance of 7m / 10m is 46 dB(A) / 44 dB(A) and the sound power level is 73 dB.

HC468/25 whisper
Maintenance of the internally installed vacuum unit and its components is possible without any problems. This requirement is ensured by wide opening and lockable doors.
The external dimensions allow the transport of two machines next to each other on the loading area of a truck.

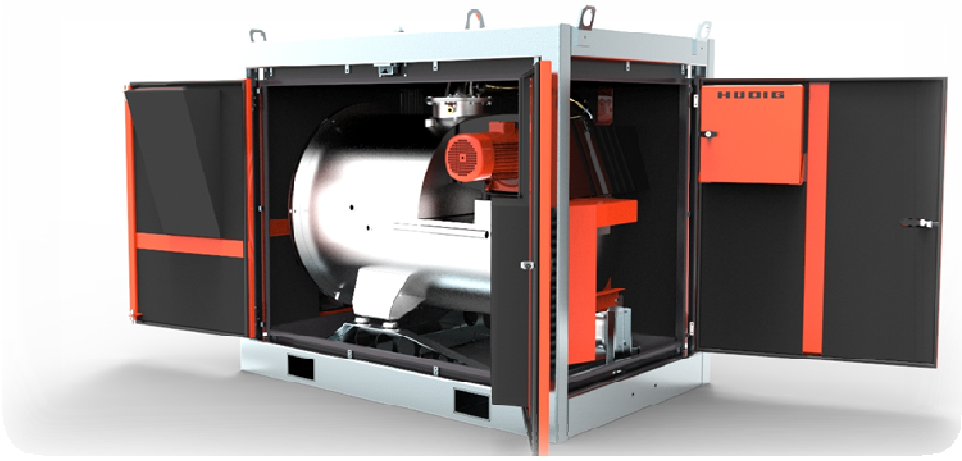

Unit Type	Shipping Dimensions	
	length x width x height	Weight
	l x w x h	m
	mm	kg
HC 468/15	1886 x 1200 x 1624	1039
HC 468/25		1044
HC 468/35		1042

Remark: Indicated weight includes the complete unit!

Subject to change without prior notice!

HÜDIG® water is our element

HÜDIG GmbH & Co. KG • Absenk- und Beregnungsanlagen
Altencelle
Heinrich-Hüdig-Str. 2
D – 29227 Celle
Tel. + 49 (0) 5141 / 88 45 -0
Fax + 49 (0) 5141 / 8 69 18
E-Mail: info@huedig.de
Homepage: www.huedig.de

ZERO EMISSIONS