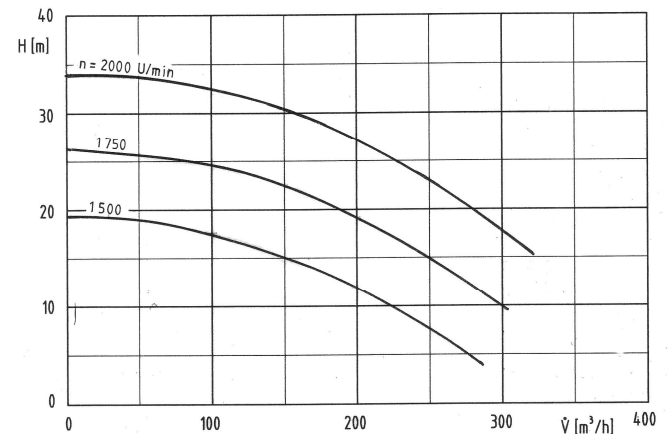


**HÜDIG Diesel-Waste Water Pump****HÜDIG®****HC 921/312/11 and HC921/312/12**[www.huedig.de](http://www.huedig.de)Water pump: reference:  $p_u = 0$  bar low pressure**Use:**

Construction industry . Industry . Communities  
For delivery of waste water

**Operation:**

The self priming waste water centrifugal pump is driven by Diesel engine through coupling. The water pump is filled with water once. Now a constant delivery of the medium is granted.

**Design:**

- Mounted on chassis, therefore movable (6 km/h)
- Tank volume for 24 h operation
- Impeller, bronze

Type	Water pump				Engine				Shipping data approx.	
	Capa- City	Head	Connec- tions	Corn- size max.	Brand	Type	Power output ICFN <sup>1)</sup>	Speed	Lengthxwidthxheight	Weight
	$V_{max}$	$H_{max}$	DN <sub>s</sub> DN <sub>D</sub>	Ø			P	n		
	m³/h	m	mm	mm			kW	1/min	l x b x h	m
HC 921/312/11	320	34	159 male	45	Deutz	F3L912	32,5	2000	2270 x 1580 x 1680	980
HC 921/312/12	280	19	159 male	45	Deutz	F3L2011	18,1	1500	2270 x 1580 x 1680	960

<sup>1)</sup> ICFN = ISO Standard fuel stop power

Subject to change without notice!

# HÜDIG - your partner to solve water problems.

**HÜDIG®**  
GmbH & Co. KG

**Absenk- und Beregnungsanlagen**

Heinrich-Hüdig-Straße 2 · 29227 Celle

Telefon (0 51 41) 88 45-0 · Fax (0 51 41) 8 69 18

e-mail: [Info@huedig.de](mailto:Info@huedig.de)