


Status 08/23	Technical Data	
Electric Submersible Pump		HÜDIG®
HC 37 ST, HC 37 SA		www.huedig.de



HC 37 ST

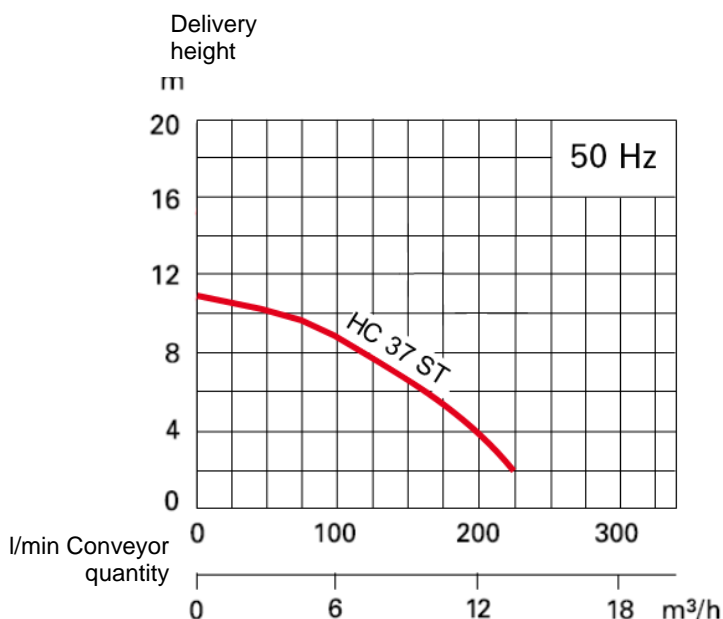

Application:

For use in the building trade, in industry and in local authorities.

Design features:

Electric submersible pump with double casing. Impeller made of wear-resistant polyurethane, double mechanical seal made of silicon carbide. The double-jacket cooling system allows for continuous submerged and slurping operation.

The pump can be equipped with a float switch for operation with highly variable inflow quantities.

Technical Data:

Protection class:	IP68
Immersion depth	max. 10 m
Rubber hose cable (electrical connection cable)	10 m H07RN-F3G 1.0 mm²
Jacket:	Stainless steel
Pump Housing:	1.4301 GG20
Shaft:	Stainless steel
Impeller:	1.4406
Bolts + screws:	Polyurethane
Mechanical seals:	1.4301
Orings:	Carbon/Ceramic + SIC/SIC NBR

Accessories:

Hoses,
Motor protection plug

HC 37 SA:

incl. float switch

Type	Pressure outlet		Motor power kW	Frequency Hz	Voltage 1-phase V	Speed 1/min	Rated current A	Delivery height max. m	Conveyor quantity max. l/min	Sieve opening mm	Dimensions mm			Weight kg
	mm	R"AG									l	w	h	
HC 37 ST	50	2"	0.37	50	230	2850	3.0	10	240	6	197	186	310	13

Subject to technical changes!



HÜDIG GmbH & Co. KG • Absenk- und Beregnungsanlagen
 Altencelle
 Heinrich-Hüdig-Str. 2
 D – 29227 Celle
 Tel. + 49 (0) 5141 / 88 45 -0
 Fax + 49 (0) 5141 / 8 69 18
 E-Mail: info@huedig.de
 Homepage: www.huedig.de