



Dimensions	Parameter	Unit	Value
	Length ¹⁾	mm	6.800
	Width	mm	3.000
	Height	mm	4.300
	Track	mm	2.250
	Weight, unloaded ^{1), 2)}	kg	5.750
	Ground clearance	mm	630
	Tires		15.0 / 55 - 17 AW, 18PR

¹⁾ Without sprinkler skid, ²⁾ Without PE-pipe

Weights	Parameter	Unit	Value		
	PE-pipe Ø 125 mm x 840 m	kg	without water	3.770	
		kg	with water	10.293	
	PE-pipe Ø 135 mm x 670 m	kg	without water	2.971	
		kg	with water	9.578	
	PE-pipe Ø 140 mm x 650 m	kg	without water	3.073	
kg		with water	9.994		

Available with the following PE pipe sizes:

- max. 840 m special PE-pipe Ø 125 x 15,6-14-11,4 mm
- max. 670 m special PE-pipe Ø 135 x 15,2-12,3-10 mm
- max. 650 m special PE-pipe Ø 140 x 15,7-13-10,4 mm

Applications

in agriculture – forestry – industry

- Agriculture areas, up to approx. 80 ha
- Vegetable cultivation
- Special crops
- Environment protection (dust suppression etc.)
- Wastewater irrigation

Sprinkler	Parameter	Unit	TWIN 202 ULTRA				
	Nozzle diameter	mm	24	26	28	30	32
	Nozzle pressure	bar	3,0				
	Water consumption	m³/h	38,5	45,6	52,6	60,4	69,1
	Throw range (WW)	m	41,5	42,9	43,1	43,5	43,8
	Effective irrigation width ³⁾	m	70,6	72,9	73,3	73,9	74,5
	Nozzle pressure	bar	4,0				
	Water consumption	m³/h	44,5	52,6	60,7	69,7	79,8
	Throw range (WW)	m	47,7	49,9	52,1	53,6	55,0
	Effective irrigation width ³⁾	m	81,1	84,8	88,6	91,1	93,5
	Nozzle pressure	bar	5,0				
	Water consumption	m³/h	49,7	58,8	67,9	78,0	89,2
	Throw range (WW)	m	51,0	53,6	56,2	58,6	61,1
	Effective irrigation width ³⁾	m	86,7	91,1	95,5	99,6	103,9

³⁾ Effective irrigation width = 2xWW-15% for overlapping and loss due to wind

Standard equipment

- Chassis with tandem-axle
- Compressed air brake system
- Fixed track width of 2.250 mm
- Tow-coupling connection
- Special gearbox (4 gears) with adjustable band brake
- Full casing
- P.T.O shaft fast rewind
- Hydraulic support legs at the back
- Hydraulic support leg at the front
- Return stop at the pipe drum
- Mechanical safety shut-down against winding faults
- Fully galvanized water inlet on both sides (depending on the choice of shutdown)
- Low pressure - and total shut-down
- Electronic speed control with pinion sensor
- Pipe guidance device (mechanical), for laying the PE-pipe in the existing structure.
- 3-wheel sprinkler trolley, with automatic lifting at the end of irrigation
- Large-area sprinkler TWIN 202 ULTRA

Special equipment

- Lighting system with warning signs incl. operating licence acc. to Road Traffic Act (StVZO)
- Pipe guidance device, fully hydraulically operated
- Solar panel for battery recharging
- Additional sprinkler for close range (electronically controlled)
- GSM control unit
- Water meter DN 100 non-calibrated or calibrated (on request)
- Supply hose DN 100, 8m, 108 female/male
- Discharge hose DN 100, 5m, 108 female
- K80 flanged Coupling ball
- Large-area sprinkler at choice
- Various, application-related sprinkler trolleys


Operating principle

HÜDIG has set standards in the development of irrigation machines. For over 100 years now, experience from agricultural irrigation has been used to develop and improve our products.

With the help of a low-maintenance, flanged gear-turbine unit and a drive sprocket bolted to the reel, the PE pipe is pulled in safely even under the highest loads. The feed speed is controlled and monitored by the HÜDIG-Control electronic feed control and a pinion sensor mounted on the gearbox.

The swinging tandem-axle from the chassis enables the machine to drive smoothly on the road and on uneven terrain.

Equipment

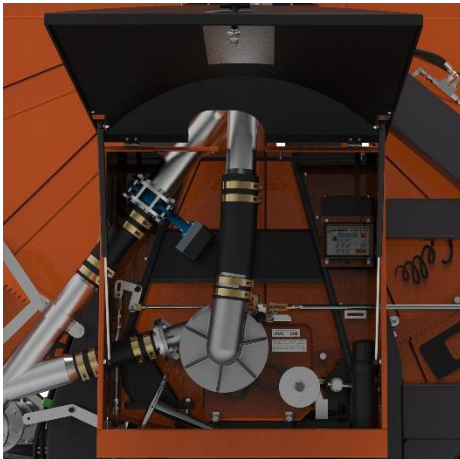

Central control unit

All essential control elements, the HÜDIG-Control electronic feed control and the drive unit are combined in the control center behind a large, lockable cover. The individual elements are clearly arranged and easily accessible.

The drive unit is a free-flow turbine with a directly adapted gearbox. This combination is characterized by good efficiency. Overall, this arrangement impresses with good operating comfort and a high degree of easy maintenance.

The HC 2.009 electronic intake control ensures uniform irrigation intensity. Pre- and post-irrigation according to the conditions can be set intuitively from 1 - max. 250 minutes. Depending on the water supply conditions, draw-in speeds of 5 - 200 m/h are possible. Furthermore, many additional options (e.g. close-range sprinklers etc.) or various draw-in parameters (e.g. start/stop time) can be controlled using HÜDIG-Control.



Tandem-axle

The Iromat V is equipped with a swinging tandem-axle and an air brake system as standard. The tandem-axle comfortably absorbs uneven road surfaces and terrain and significantly increases overall driving safety. A 40 mm flange towing eye or optionally a K80 coupling ball ensure convenient road transportation.

An optionally available lighting package including a TÜV certificate for obtaining an operating license in accordance with the German Road Traffic Licensing Regulations (StVZO), ensures safe participation in road traffic.



Automatic sprinkler trolley lifting

At the end of the irrigation cycle, the sprinkler wagon automatically lifting (the energy is taken from the water volume flow required for irrigation). The rear support legs are retracted manually via the oil hydraulics after irrigation is complete. This convenience reduces set-up times to a minimum.



Sprinkler trolley

The 3-wheel sprinkler trolley developed by HÜDIG has exceptional directional stability even on uneven terrain. A robust and wear-free level compensation system prevents the large-area sprinkler from dipping at the end of the irrigation process.

A convenient, central pulling device is available for pulling out the hose in the tractor track with a narrow agriculture rail.

For tall crops, e.g. maize, a maize sprinkler trolley can be used as an option.

For particularly heavy-duty applications, a 5-wheel sprinkler trolley with integrated tandem swing axle can also be used.